
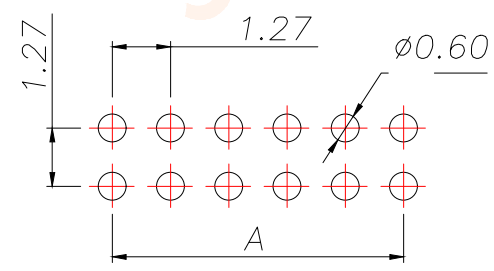
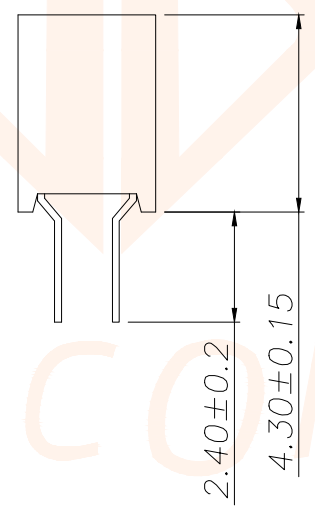


SPECIFICATIONS
 Current Rating: 1.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Operation Temperature: -40° to +105°
 Insulator Material: Polyester (UL94V-0)
 Contact Material: Phosphor bronze
 Standard: PA6T
 Contact Plating: Gold Flash
 Max. Processing Temp: 240°C for 30-60 seconds
 (260°C for 5 seconds)

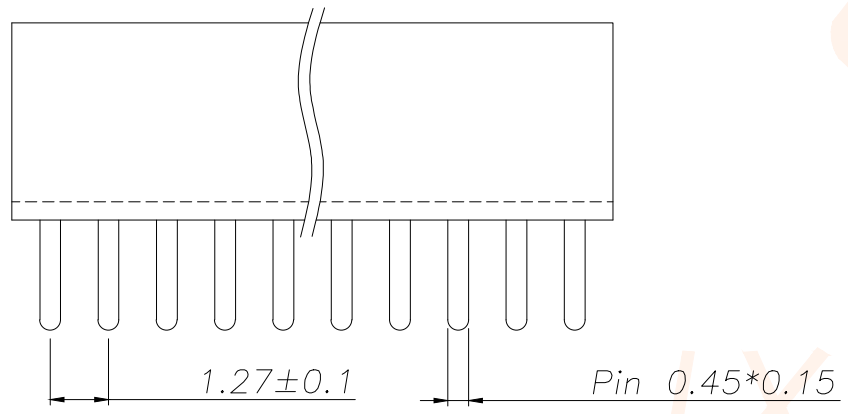

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

P/N	PIN	DIM.A	DIM.B
JXT-PM1.27-2X1P-A1	2*1	0.00	1.27
JXT-PM1.27-2X2P-A1	2*2	1.27	2.54
JXT-PM1.27-2X3P-A1	2*3	2.54	3.81
JXT-PM1.27-2X4P-A1	2*4	3.81	5.08
JXT-PM1.27-2X5P-A1	2*5	5.08	6.35
JXT-PM1.27-2X6P-A1	2*6	6.35	7.62
JXT-PM1.27-2X7P-A1	2*7	7.62	8.89
JXT-PM1.27-2X8P-A1	2*8	8.89	10.16
JXT-PM1.27-2X9P-A1	2*9	10.16	11.43
.....
JXT-PM1.27-2X50P-A1	2*50	(50-1)x1.27	(50)x1.27

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd	
X.X ±0.30	X.° ±5°	PART NO.	TITLE: 1.27FH H4.3 2xnPin
.XX ±0.20	X.X° ±1°	JXT-PM1.27-2XNP-A1	180° W3.0 U型 PC2.4 6T
.XXX ±0.10	X.XX° ±0.5°	DESIGN: Ethan	MANUFACTURE DWG
UNITS	mm	CHED: Olivia	SCALE SHEET N:A 1/1
MATERILA	---	APPD: Ava	
FINISH	---		